



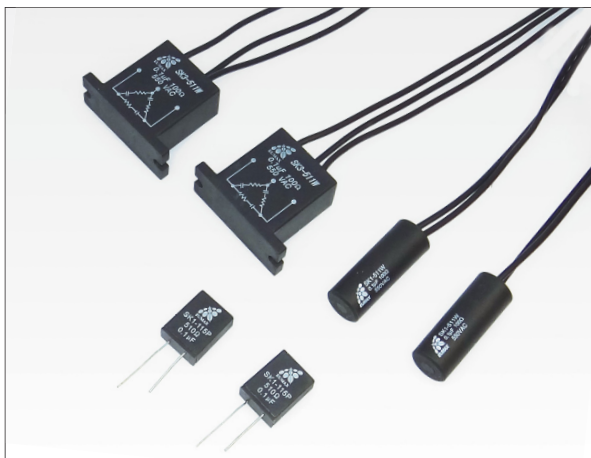

特點 Features

- 消除觸點火花
- 消除浪涌電壓
- 降低電源線噪音
- 延長觸點壽命
- To eliminate the contact spark
- To suppress the voltage surge
- To reduce the power line noise
- To extend the contact life

產品尺寸圖 Dimension Drawing

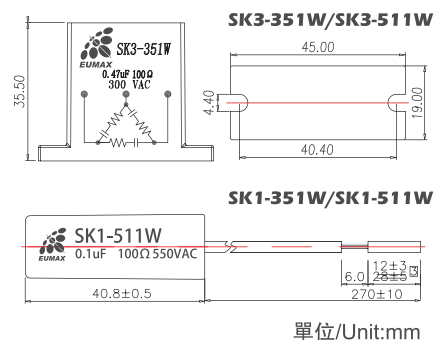


規格 Norminal Size

型號	Type	SK3-511W	SK3-351W	SK1-511W	SK1-351W	SK1-115P
相別	Phases	三相 3-Phase	三相 3-Phase	單相 1-Phase	單相 1-Phase	單相 1-Phase
最大工作電壓	Max. Working Voltage	550VAC	300VAC	550VAC	300VAC	250VAC
電容值	Capacitance	0.1uF	0.47uF	0.1uF	0.47uF	0.1uF
電阻值	Resistance	100Ω	100Ω	100Ω	100Ω	510Ω
電阻瓦數	Wattage	2W				1W
電壓頻率	Frequency	50/60Hz				
最大持續電壓	Continuous Working Volt.	1500Vpp/1ms	900Vpp/1ms	750Vpp/1ms	750Vpp/1ms	500Vpp/1ms
絕緣阻抗	Insulation Resistance	100MΩ/500VDC				
耐電壓	Dielectric Strength	2500VAC/1min				
工作溫度	Operating Temp.	-25°C ~ +70°C				
外殼材質	Housing Material	Intensive PBT				
綫長	Wire Length	270±10mm				
重量	Weight	Appr. 35g	Appr. 35g	Appr. 15g	Appr. 15g	Appr. 4.5g



產品尺寸圖 Dimension Drawing

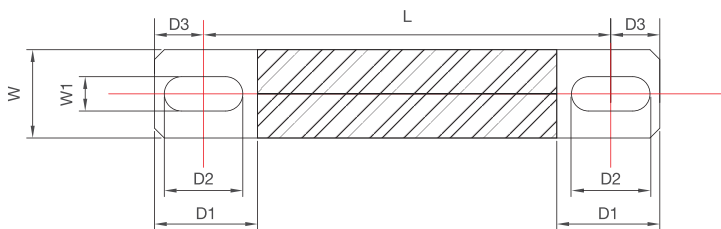

單位/Unit:mm

規格 Specification

項目	Items	規格說明	Descriptions
材質	Material	黃銅鍍鎳	Nickle-plated Brass
規格	Nominal Size	14W x 1.5T	
截面積	Cross-Section	21mm ²	
耐電流	Rated Current	100A	

P/N	W	W1	D1	D2	D3	L
K2-60	14	7	21	16	10	60
K2-81	14	7	21	16	10	81
K2-85	14	7	21	16	10	85
K2-90	14	7	21	16	10	90
K2-103	14	7	21	16	10	103
K2-124	14	7	21	16	10	124
K2-145	14	7	21	16	10	145
K2-158	14	7	31	16	10	158